




Classic Series Mono Solar Module

SR-M660
300W~320W

SR-M660300
SR-M660305
SR-M660310
SR-M660315
SR-M660320

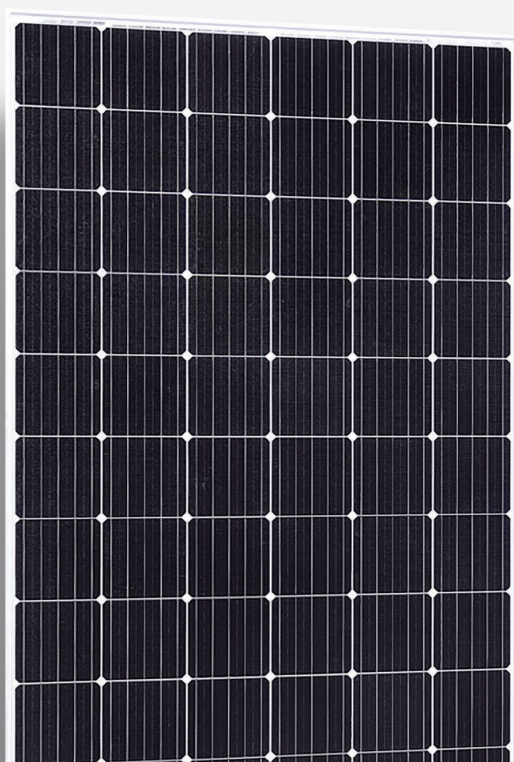

0~3% positive tolerance



3.2mm High Transmission,
Low Iron Tempered AR Glass



Better Low-light
Performance



Strengthened Mechanical
Support 5400 Pa Snow
Load, 2400 Pa Wind Load




5 Bus Bar solar Cell
With PERC Technology



PID Resistance

Additional value from SUNRISE linear warranty

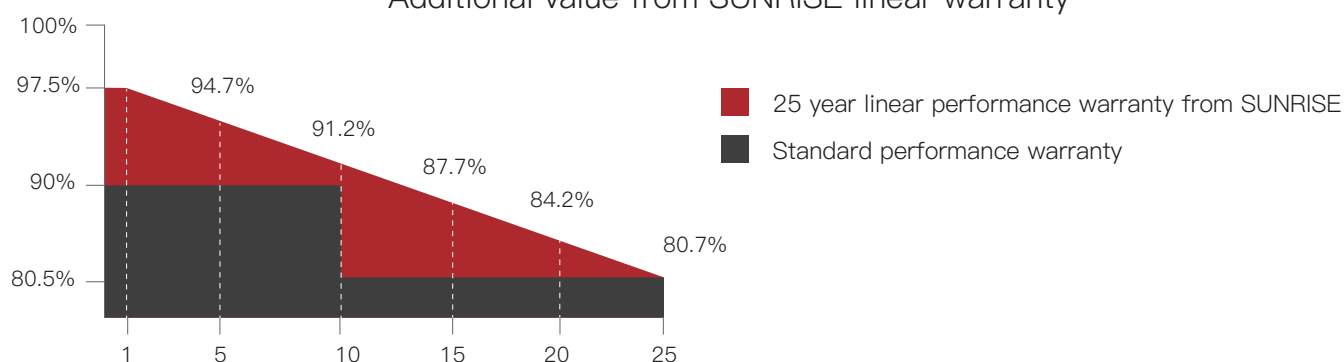

60 Cells Mono Module




Module Type		SR-M660300		SR-M660305		SR-M660310		SR-M660315		SR-M660320	
Test Environment		STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Tolerance	(%)	0~+3		0~+3		0~+3		0~+3		0~+3	
Module Efficiency	(%)	18.47		18.78		19.09		19.4		19.67	
Maximum Power	P _{max} (W)	300	220.5	305	224.2	310	227.85	315	231.53	320	235.2
Open Circuit Voltage	V _{oc} (V)	39.13	36.6	39.24	37.02	39.36	37.33	39.46	37.62	39.44	37.6
Short Circuit Current	I _{sc} (A)	10.02	7.93	10.16	8.16	10.29	8.26	10.43	8.38	10.6	8.52
Maximum Power Voltage	V _m (V)	31.64	29.7	31.73	30.06	31.83	30.25	31.91	30.53	32.01	30.63
Maximum Power Current	I _m (A)	9.49	7.41	9.62	7.72	9.74	7.81	9.87	7.92	10.01	8.03
Cell Type	(mm)	156.75x156.75 Mono-Crystalline Silicon									
Number of Cells	(Pcs)	60(6×10)									
Maximum System Voltage	(V)	DC1000									
Temp. Coeff. of V _{oc}	(%/°C)	-0.35									
Temp. Coeff. of I _{sc}	(%/°C)	0.05									
Temp. Coeff. of P _m	(%/°C)	-0.45									
Operating Temperature	°C	-40 to 85									
Nominal Operating Cell Temperature (NOCT)	°C	45±2									
Max. Series Fuse	(A)	15									
Pressure Bearing	(Pa)	5400									
Wind Bearing	(Pa)	2400									

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1m/s

ENGINEERING DRAWINGS

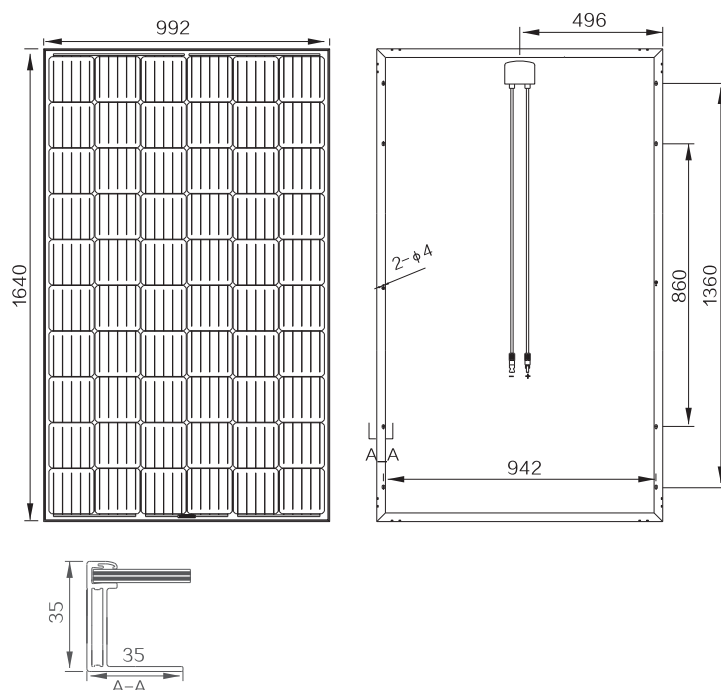


Manufactured in China


MATERIAL DETAILS

Frame	Anodized aluminum
Glass	3.2mm low-iron tempered suede glass
Cell	6×10 pcs 156.75mm mono solar cell
Junction Box	Rated Current ≥15 A I _p ≥ 67, TUV & UL
Cable&Connector	4mm ² , MC4 or MC4 compatible

IV CURVES

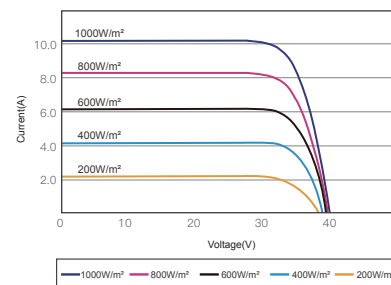

I-V CURVES OF PV MODULE(310W)

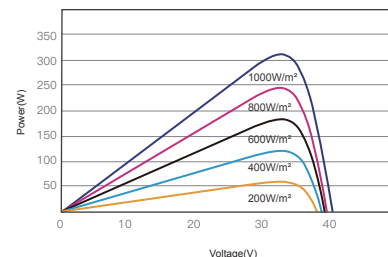

P-V CURVES OF PV MODULE(310W)

PACKING DETAILS

Dimension	(mm)	1640×992×35
Weight	(kg)	18.2
Loading Capacity	360 pcs/20' GP 924 pcs/40' HC	
Packing	pcs/pallet	30